



US006016804A

United States Patent [19]
Gleason et al.

[11] **Patent Number:** **6,016,804**
[45] **Date of Patent:** **Jan. 25, 2000**

[54] **RESPIRATORY MASK AND METHOD OF MAKING THEREOF**

[75] Inventors: **Colin M. Gleason**, Akron; **Valentin A. Castro**, Williamsville, both of N.Y.

[73] Assignee: **Scott Technologies, Inc.**, Mayfield Heights, Ohio

[21] Appl. No.: **09/177,166**

[22] Filed: **Oct. 22, 1998**

Related U.S. Application Data

[60] Provisional application No. 60/063,151, Oct. 24, 1997.

[51] **Int. Cl.**⁷ **A62B 7/10**; A62B 18/02; A62B 18/08

[52] **U.S. Cl.** **128/206.17**; 128/205.25; 128/206.12; 128/206.16; 128/206.21; 128/206.28

[58] **Field of Search** 128/205.27, 205.25, 128/206.12, 206.16, 206.17, 206.21, 206.27, 206.28; 2/206, 454

[56] **References Cited**

U.S. PATENT DOCUMENTS

4,164,942 8/1979 Beard et al. 128/146.5

4,790,306	12/1988	Braun et al.	128/206.12
4,951,664	8/1990	Niemeyer	128/206.24
4,960,121	10/1990	Nelson et al.	128/206.24
5,062,421	11/1991	Burns et al.	128/205.27
5,231,982	8/1993	Harrison et al.	128/207.12
5,408,995	4/1995	Contino et al.	128/205.25
5,592,937	1/1997	Freund	128/206.16
5,628,308	5/1997	Harges, Jr. et al.	128/206.17
5,794,617	8/1998	Brunell et al.	128/206.12

FOREIGN PATENT DOCUMENTS

309277	3/1989	European Pat. Off. .
2143136	2/1985	United Kingdom .

Primary Examiner—John G. Weiss


Assistant Examiner—Todd M. Martin


Attorney, Agent, or Firm—Hodgson, Russ, Andrews, Woods & Goodyear, LLP

[57] **ABSTRACT**

A facepiece insert and facepiece combination suitable for use as a respiratory mask. The respiratory mask may be combined with air purifying cartridges or breathable gas sources such as oxygen reservoirs. The insert is molded flat with living hinges, and the facepiece body is molded onto the insert in sealing engagement.

24 Claims, 8 Drawing Sheets

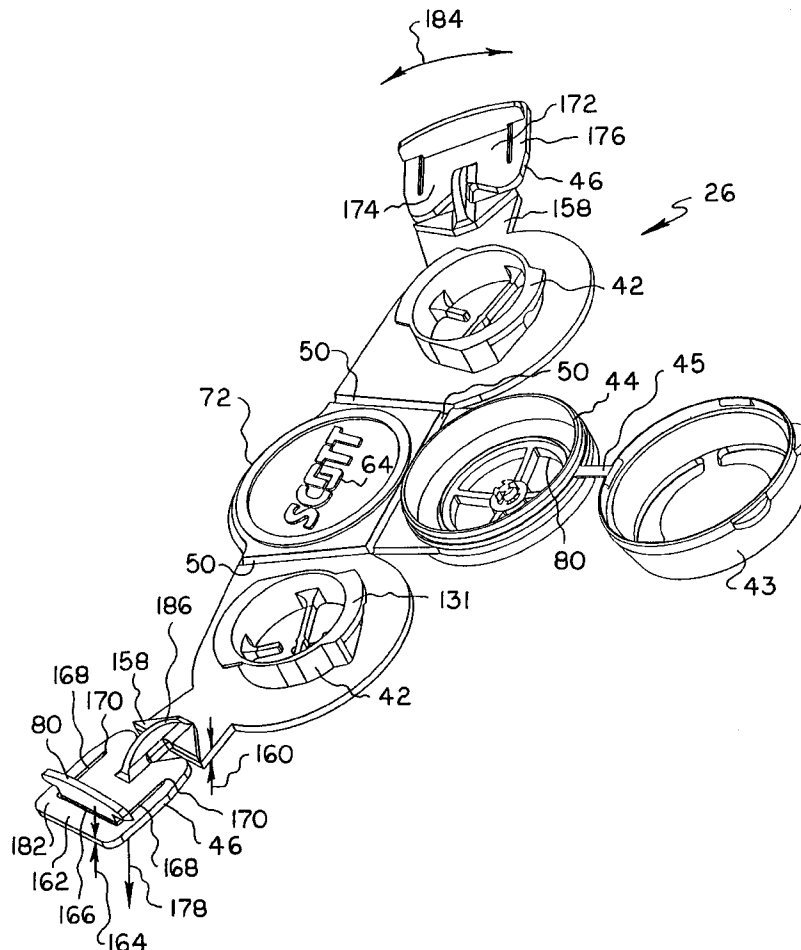

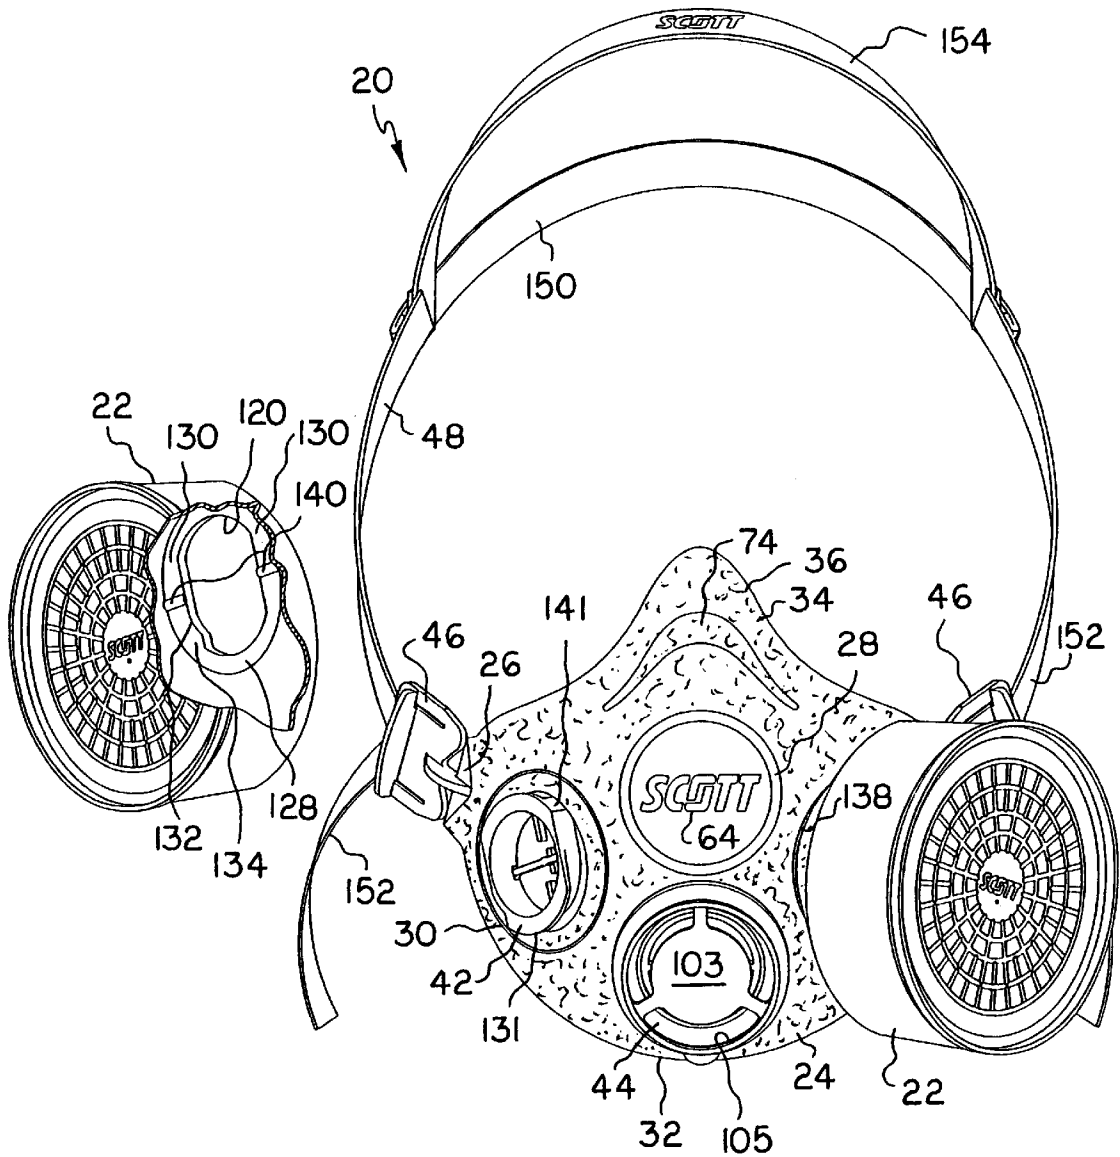

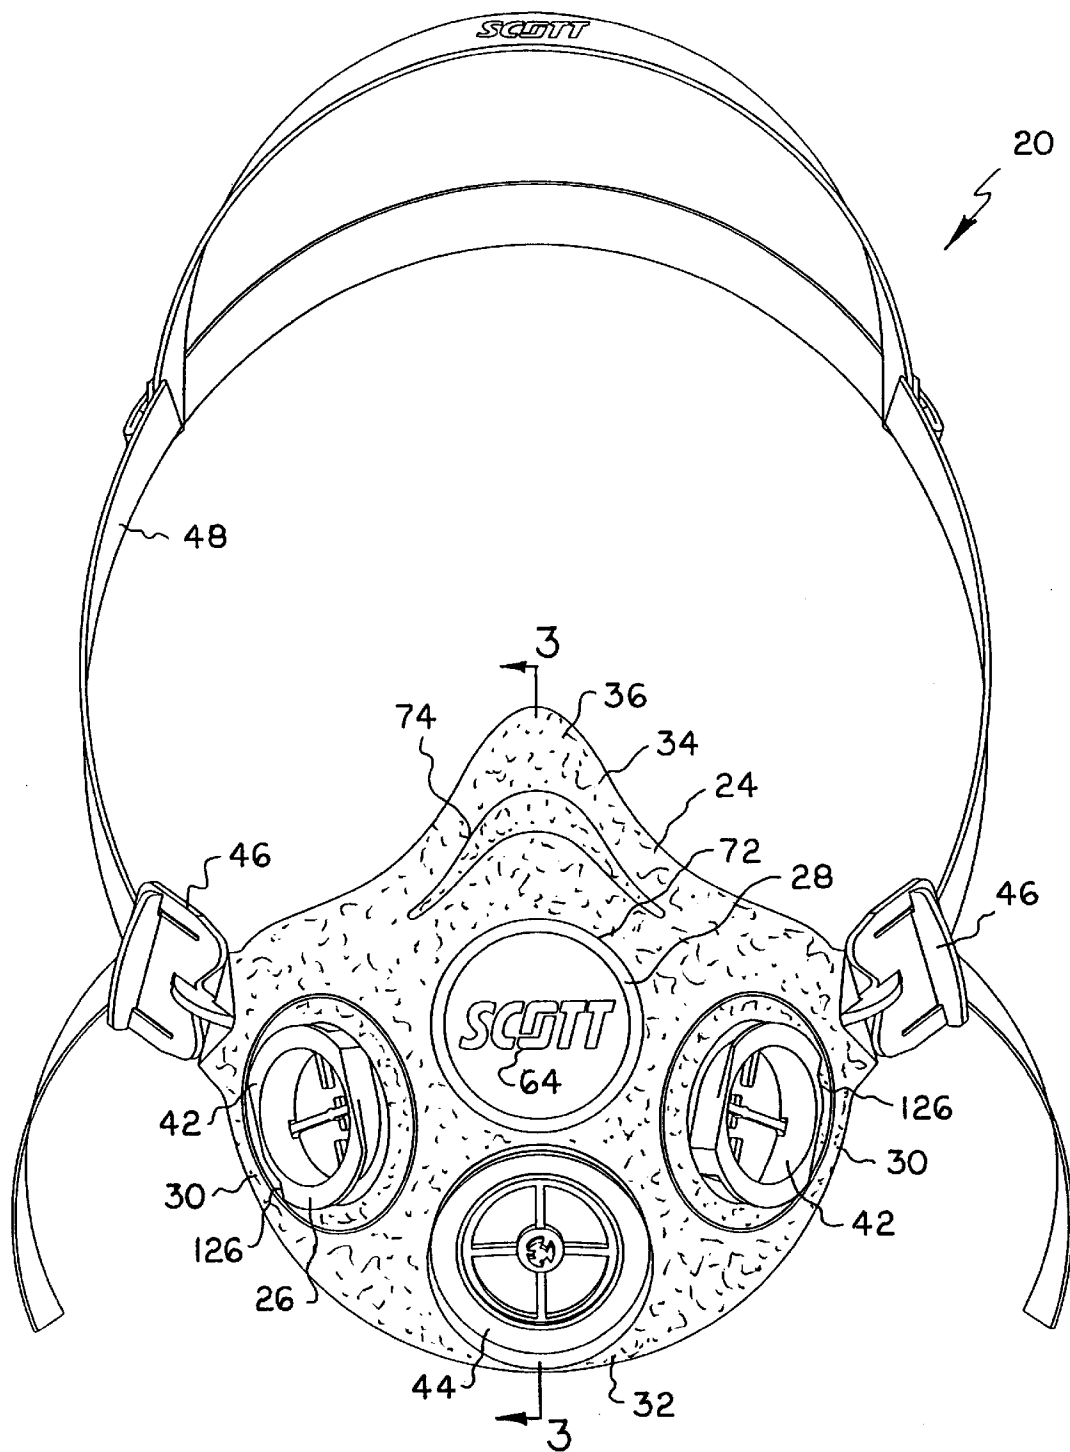


FIG. 2

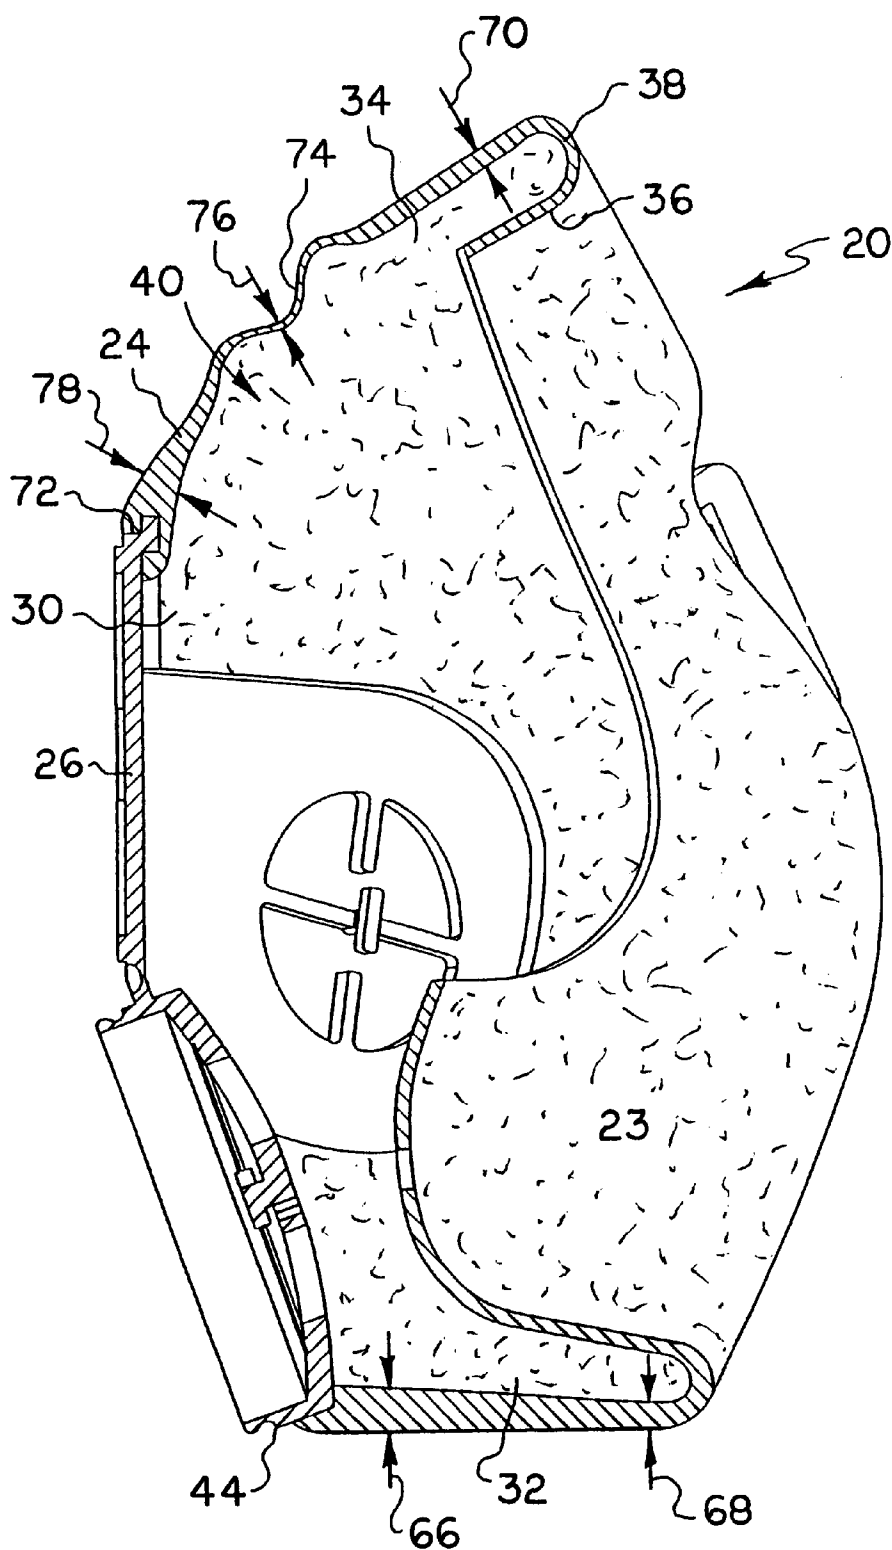


FIG. 3

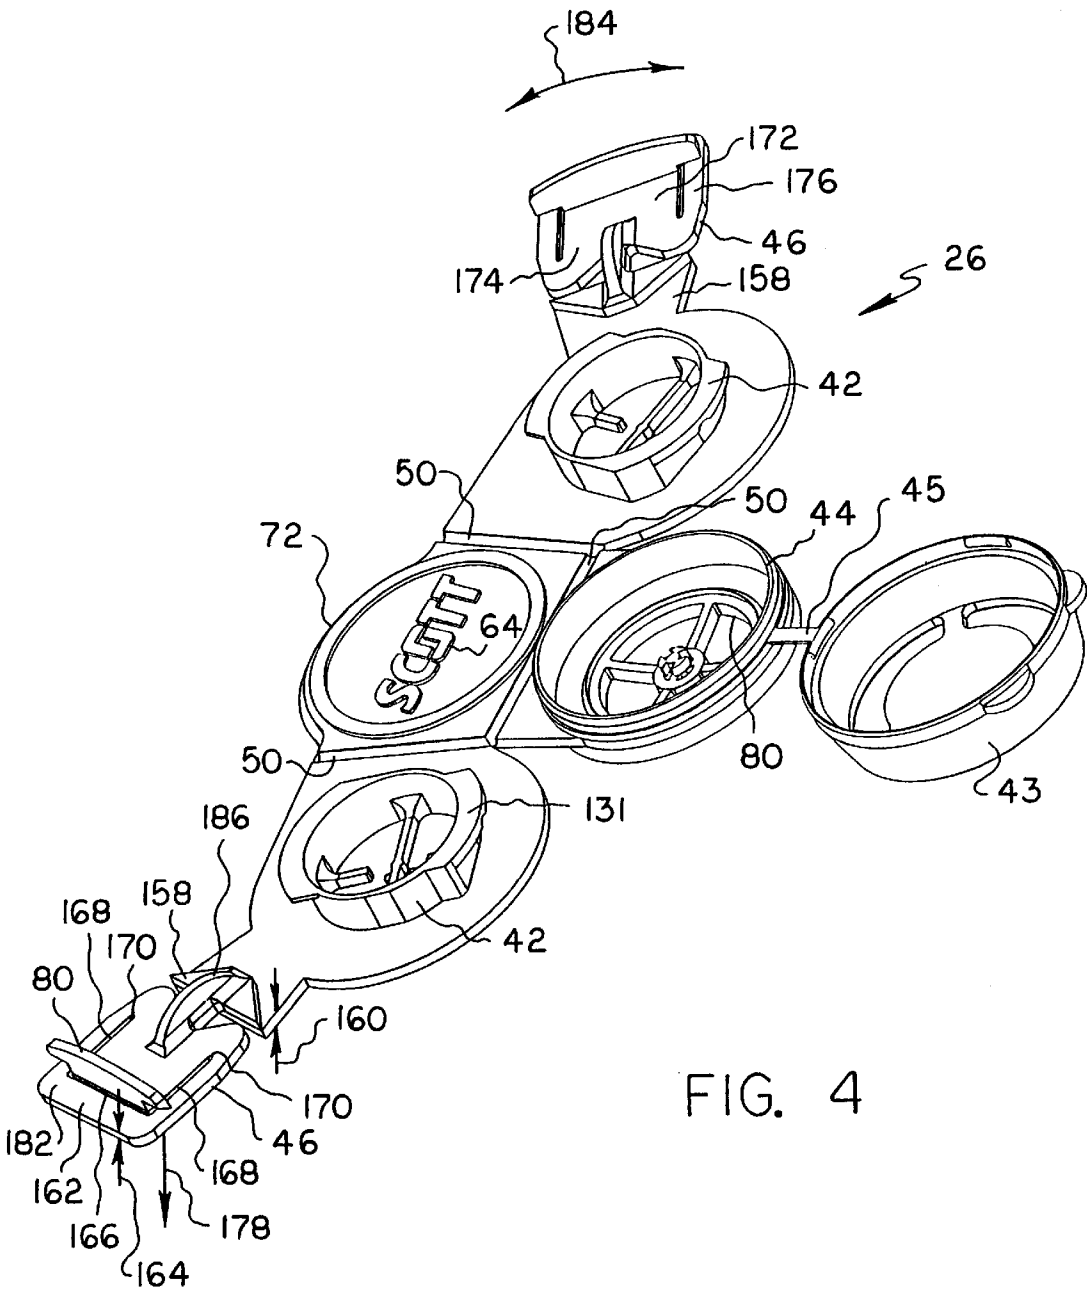


FIG. 4

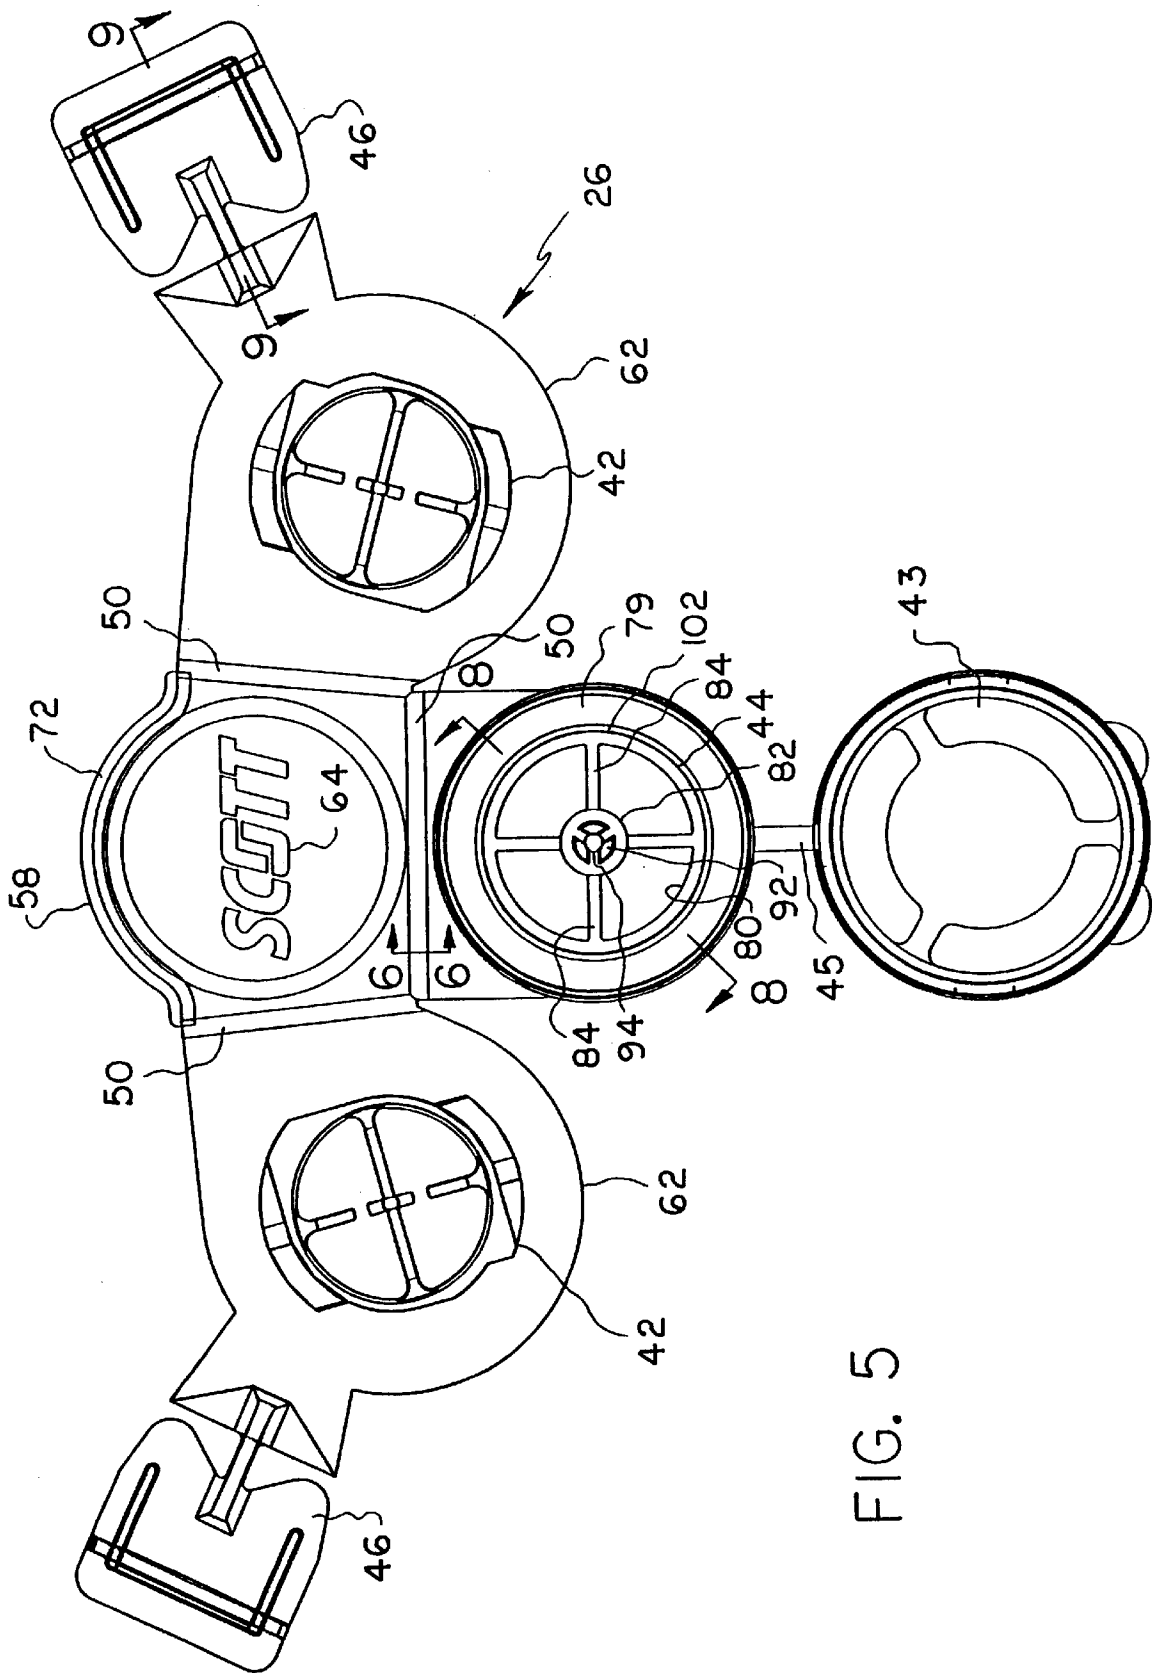


FIG. 5

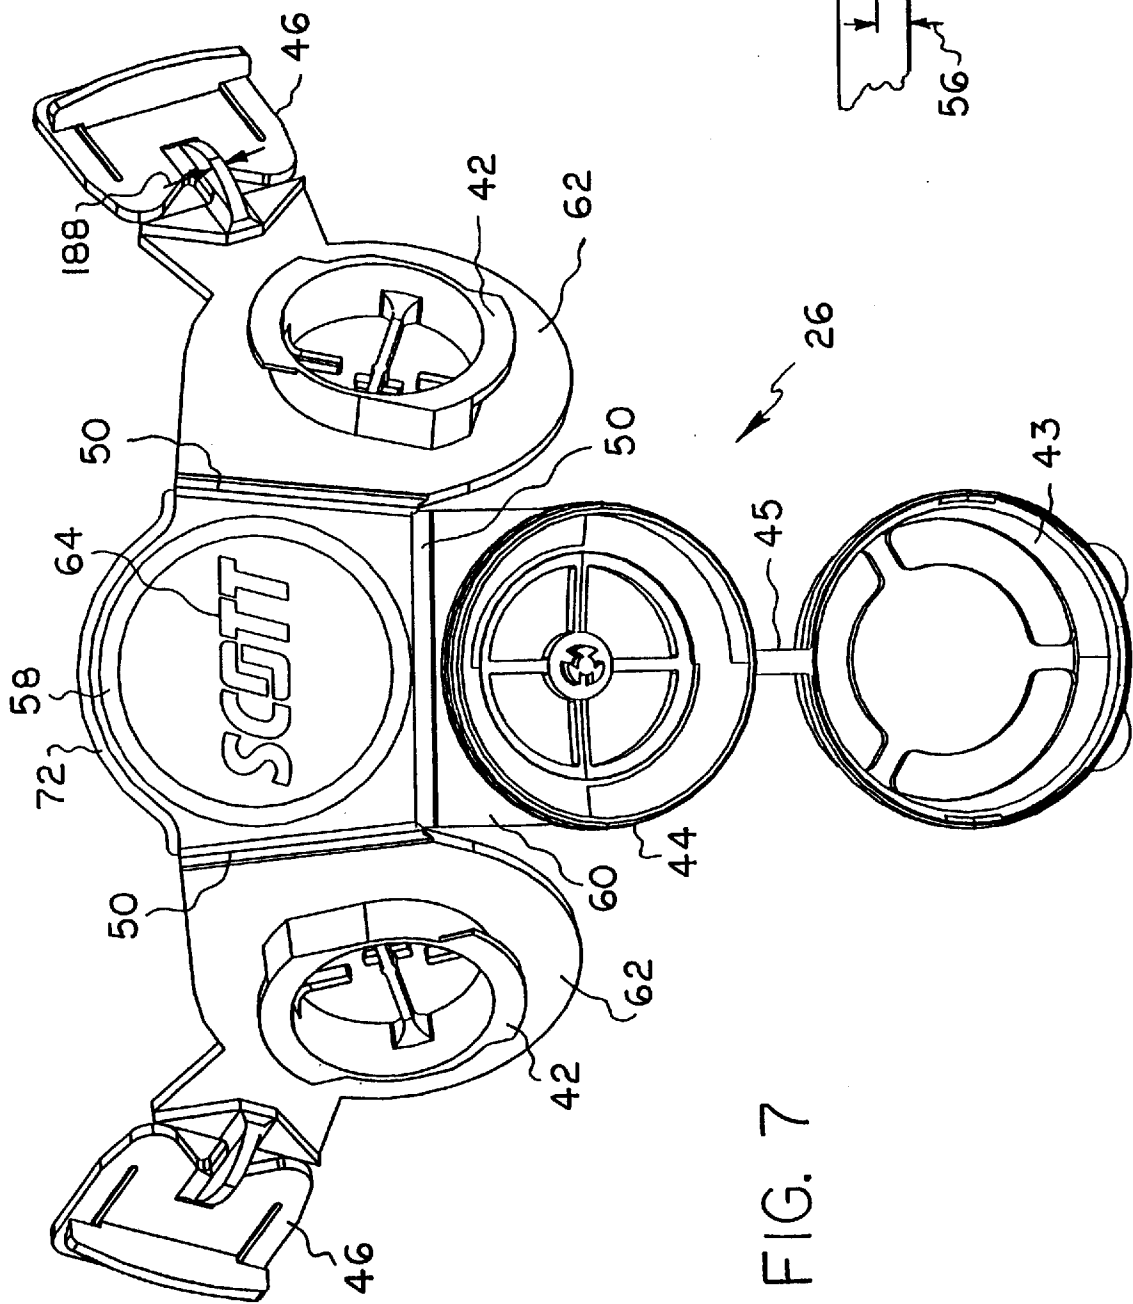


FIG. 9

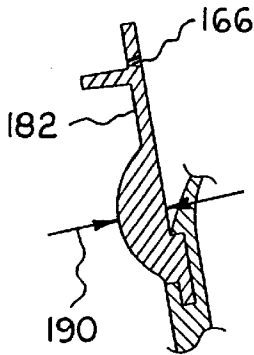


FIG. 8

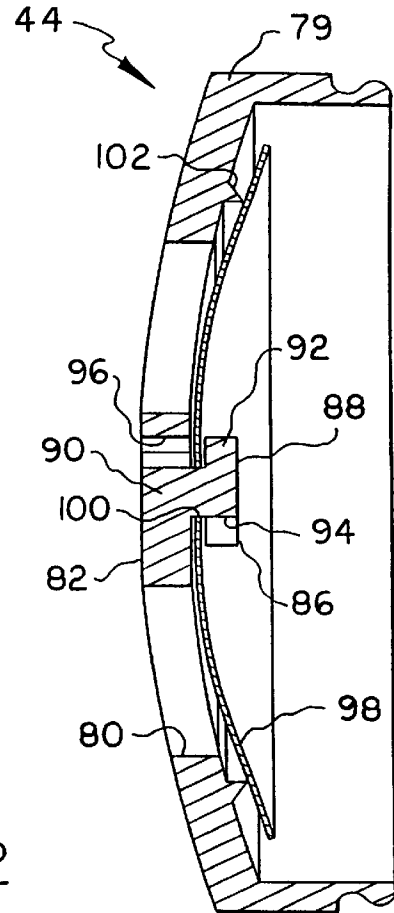


FIG. 13

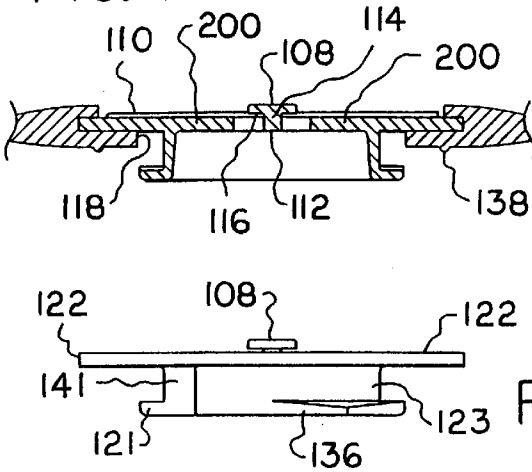


FIG. 12

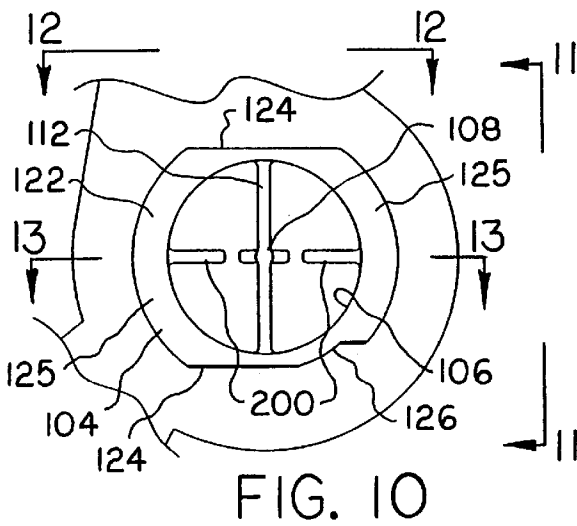


FIG. 10

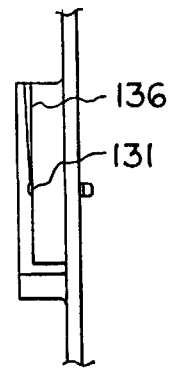


FIG. 11

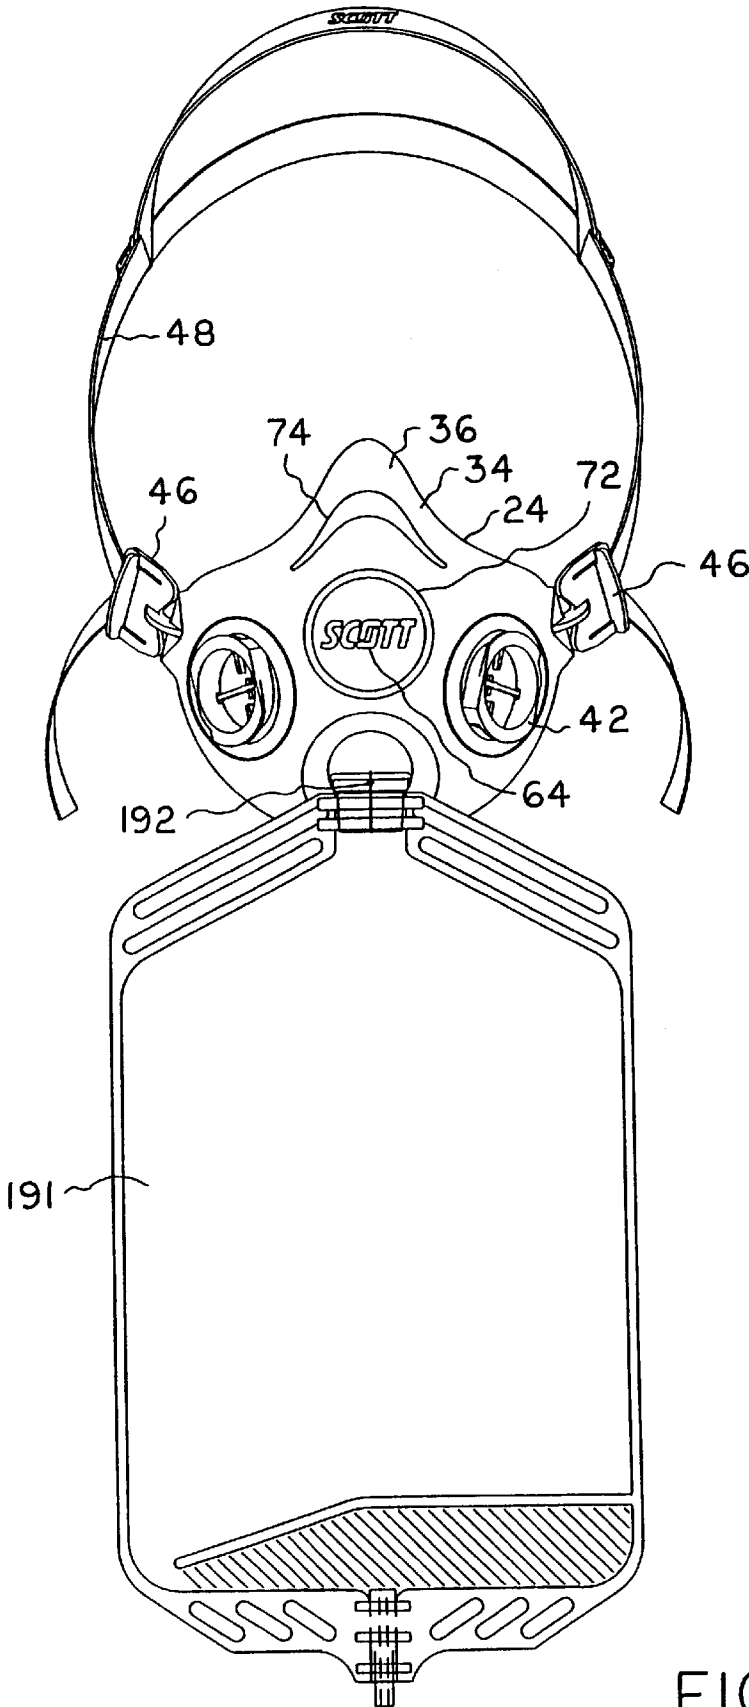


FIG. 14

1

RESPIRATORY MASK AND METHOD OF MAKING THEREOF

CROSS REFERENCE TO RELATED APPLICATION

Applicants hereby claim priority based on Provisional Application No. 60/063,151 filed Oct. 24, 1997, and entitled, Mask for Respiratory Protection and Method of Making Thereof, which is incorporated herein by reference.

FIELD OF THE INVENTION

The present invention relates generally to respiratory masks and particularly to a facepiece insert and facepiece and a method of making thereof.

BACKGROUND OF THE INVENTION

Respirators and other masks for supplying breathing gas to the user typically have facepieces made of a soft compliant material, such as rubber to form a seal with the user's face. In order to support filters and exhalation valves and the like, some masks have been made so that the rubber is thick, which undesirably makes the mask heavy and uncomfortable to wear, as well as more expensive to manufacture. However, if the rubber thickness is reduced, the mask may tend to collapse onto the user's face especially when the harness is tightened for donning the mask.

U.S. Pat. No. 5,062,421 describes a respirator mask wherein a large single rigid insert serves as a structural member for attachment of filter cartridges and an exhalation valve assembly and for support of the facepiece which is permanently sealed thereto. Each filter cartridge is described as asymmetric and swept back to shift the center of gravity inwardly toward the wearer's head, thus making the mask seem to be lighter to the wearer. This insert has swept-back cheek portions and is otherwise formed to conform to the shape of the mask, i.e., non-flat. Not only is such a mask not flexible enough to provide a comfortable fit over various face sizes but the non-flat insert is difficult to manufacture.

In order to provide a more comfortable fit, U.S. Pat. No. 5,592,937 discloses a respirator mask having a very soft compliant facepiece that has several stiffening elements integrated therein. The stiffening elements include an exhalation valve structure and structures for mounting filter cartridges, respectively. A yoke to which harness straps are attached is placed on top of the facepiece. Such a mask may be more flexible than desired due to the rubber material between the elements. Although the elements are flat, the requirement of more than one of them, as well as the requirement of the yoke, undesirably increases the manufacturing costs.

Accordingly, what is needed is a mask that is inexpensive to manufacture and that provides a comfortable sealing fit over various face sizes while having sufficient rigidity so that it does not collapse during normal use.

SUMMARY OF THE INVENTION

The present invention meets the above-described need by providing a single piece of rigid material that is molded flat with living hinges and with means for attaching one or more air purifying filters or cartridges or hoses for supplying breathing gases. The single piece is bent or folded along the living hinges into a shape conforming to the mask shape and a face seal of pliable material is molded thereto to form a facepiece. The living hinges allow flexure of the finished mask for fitting comfortably to various face sizes. A harness

2

attachment is preferably molded integrally with the single piece of rigid material.

The above and other objects, features, and advantages of the present invention will be apparent from the following detailed description of a preferred embodiment of the present invention when read in conjunction with the accompanying drawings wherein the same reference numerals designate the same or similar parts throughout the several views.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is an outside perspective, partially exploded, view of a mask which embodies the present invention, with a portion of a filter cartridge removed and with valves not shown for ease of illustration.

FIG. 2 is an outside perspective view thereof with the filter cartridges and exhalation valve cover removed.

FIG. 3 is a sectional view thereof taken along lines 3—3 of FIG. 2.

FIG. 4 is an outside perspective view of the insert member thereof, in a flat form.

FIG. 5 is an outside plan view of the insert, in a flat form.

FIG. 6 is a sectional view of a portion of the insert taken along lines 6—6 of FIG. 5.

FIG. 7 is an outside perspective view of the insert which has been bent to a shape conforming to the mask shape for molding of the facepiece thereto.

FIG. 8 is a sectional view of the exhalation valve structure, with the exhalation valve mounted thereon, taken along lines 8—8 of FIG. 5.

FIG. 9 is a sectional view of a harness attachment portion of the insert taken along lines 9—9 of FIG. 5.

FIG. 10 is an outside plan view of a filter cartridge attachment structure therefor.

FIG. 11 is a side view thereof taken along lines 11—11 of FIG. 10.

FIG. 12 is a side view thereof taken along lines 12—12 of FIG. 10.

FIG. 13 is a sectional view thereof taken along lines 13—13 of FIG. 10.

FIG. 14 is a perspective view of an alternate embodiment of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

While the mask described herein is a half facemask, i.e., it is constructed to cover the mouth and nose but not the eyes, it should be understood that a mask which embodies the present invention may alternatively be a full facemask; i.e., it is constructed to cover the eyes as well as the mouth and nose or a quarter mask; i.e., it is constructed to cover the nose and mouth but not extend under the chin; or it may be another type of face covering. In addition, while the mask described in connection with the preferred embodiment is constructed for attachment of air purifying cartridges to serve as a respirator, it should be understood that a mask which embodies the present invention may alternatively be constructed for attachment of hoses for delivering oxygen or other breathable gas.

Referring to the drawings, there is shown generally at 20 a half facemask for covering the nose and mouth of a person for protecting the person from airborne contaminants by means of air purifying cartridges or filters 22. As used herein

and in the claim(s), “breathing gas” is meant to include air which has been filtered or otherwise treated so that airborne contaminants are removed therefrom, as well as oxygen or other breathing gas supplied from a source.

While the mask **20** is shown to have two air purifying cartridges **22** (one on each of the swept-back sides) to provide a large total area to breathe through so that the breathing resistance is desirably minimized, it should be understood that, in accordance with the present invention, the mask need be provided with only one such cartridge **22**. It should also be understood that the mask may be provided with more than two cartridges **22**. Various types of cartridges (some containing gas absorbents and others containing mechanical filters and others containing both) may be interchangeably attached to the mask (as long as each of the cartridges attached to a mask is of the same type), and the mask should be fitted for a particular use with the type of cartridge that is suitable for removing the particular contaminants in the environment at the time of use. It should also be understood that there may be one or more exhalation valves, that a tube may be used to carry off exhaled gases, that an antisuffocation valve may be used, and that a separate passageway for exhalation gases may not be required as the gas inlet could be designed to handle the egress of exhalation gases on a part-time basis.

The mask **20** is formed of a faceseal or body **24** composed of a suitable soft pliable material, described hereinafter, for comfortably as well as sealingly engaging the face of a user and is further formed of a member or insert **26** composed of a single piece of thin rigid material, such as, for example, polypropylene, which is lightweight, low-cost, and strong, or other suitable plastic. The insert **26** may be made more inexpensively as a single piece than if it were necessary to make several insert pieces. The body **24** is molded or otherwise suitably sealingly attached to the insert **26**, and the composite mask suitably shaped to suitably and sealingly fit a user's face; i.e., it has a front portion **28**, the two swept-back cheek portions **30**, a lower swept-back portion **32** for engaging the chin of the user, and an upper swept-back portion **34** for covering the nose and engaging the bridge of the nose. The nose portion **34** sweeps downwardly from the bridge of the nose on each side so as not to obstruct the vision of the user. The perimetric portion **36** of the body **24** is folded inwardly of the mask to provide a sealing edge **38** (FIG. 3) for sealingly yet comfortably engaging the user's face all around the perimeter of the mask. Thus, a breathing cavity **40** is provided between the mask and the user's face wherein the user's nose and mouth are isolated from the outside environment so that only the gases provided by the cartridges **22** are available for breathing. At **23** is a chin perspiration slot; i.e., a hole in the chin area on the inside of the mask to allow perspiration which may form on the user's skin during use to drain into the mask cavity to improve wear or comfort.

The rigid insert **26** is formed to have structure **42** for attachment of the cartridges **22**. The rigid insert **26** is also formed to have an exhalation valve structure **44** (on the chin portion **32** of the mask) and harness adjusters **46** (on the cheek portions **30** of the mask) for attachment of a harness **48**. These structures will be discussed in greater detail hereinafter.

The material of which the mask body **24** is composed is selected to have a suitable firmness so that it doesn't “cave-in,” yet has a good feeling against the face of the user. It is also desirable that the material be minimally prone to compression set and be light in weight. Other desirable features include good processing times, compatibility with

the molding process, good environmental resistance, and low cost. For example, the mask body **24** may be composed of a thermoplastic rubber, such as Sanoprene rubber provided by Monsanto Company, having the thickness otherwise described herein and having a durometer hardness, on the Shore A scale, of about 45 to 60 (preferably 55 to 60). The mask body **24** may be composed of other suitable elastomeric materials such as silicones, chloroprene rubber, other natural or synthetic rubbers, or mixtures thereof.

The insert is molded flat, as illustrated in FIGS. 4 and 5, so that it may be molded more inexpensively than if it were molded in the shape, illustrated in FIG. 7, which conforms to the shape of a face and which the mask ultimately takes.

In order to bend or fold the rigid insert **26** to the desired shape (FIG. 7) for molding of the body **24** thereto, in accordance with the present invention, living hinges, illustrated at **50**, or other suitable means are formed in the insert **26** to allow bending or folding of the rigid insert **26**. A living hinge **50** is a line of reduced thickness defined by a groove, illustrated at **52** in FIG. 6, which reduces the insert thickness sufficiently for such bending to occur. The groove **52** should be radiused (rounded) so that bending, rather than breaking, occurs. For example, the insert thickness, illustrated at **54** (exclusive of increased thicknesses for the cartridge attachment, exhalation valve, and harness adjuster structures and the like), may be about 0.07 inch, and the reduced insert thickness, illustrated at **56**, at the groove **52** may be about 0.015 inch. As seen in FIG. 7, the insert **26** has a portion **58** corresponding to the front portion **28** of the mask, a portion **60** corresponding to the chin portion **32** of the mask and defined by a living hinge **50** therebetween, and a pair of portions **62** corresponding to the cheek portions **30**, respectively, of the mask and defined by a pair of living hinges **50**. A cartridge attachment structure **42** and a harness adjuster **46** are integrally molded in each of the cheek portions **62**, the exhalation valve structure **44** is integrally molded in the chin portion **60**, and a logo, illustrated at **64**, may be applied to the front portion **58**. The logo area **58** alternatively may be used for additional attachments, such as a third cartridge, a device to transmit sound, an antisuffocation valve, or electronic attachments and the like. As shown in FIGS. 4–6, the insert **26** preferably includes an integrally molded exhalation cap **43** that is connected to the insert **26** by a bridge portion **45** that is flexible such that it bends when the cap **43** is placed over the exhalation valve structure **44**. The bridge portion **45** may include a frangible section for removing the cap **43** when it is not used.

With the molded insert **26** folded or bent into the desired form (FIG. 7), it is inserted in a mold and the body **24** of elastomeric material molded to the insert **26**, as illustrated by stippling in FIGS. 1, 2, and 3, leaving the cartridge attachment, exhalation valve, and harness attachment structures **42**, **44**, and **46**, respectively, free of the elastomer.

The body **24** is molded to minimize its thickness for the user's comfort and to minimize cost of material, yet to have sufficient thickness to prevent collapse when the mask is donned, and its thickness may vary, as seen in FIG. 3. Thus, for example, in the chin area, the body **24** may have a thickness, illustrated at **66**, of about 0.14 inch which tapers to a thickness, illustrated at **68**, of about 0.065 inch at the edge **38**. For another example, the body **24** may have a thickness, illustrated at **70**, of about 0.055 inch with an increased thickness at its attachment to the insert **26**. The edge of the insert **26** may be suitably notched, as illustrated at **72**, to provide an enlarged portion or shelf around which the body is molded to mechanically interlock the body **24** to the insert **26**. For attachment of the body **24** to the notched

edge of the insert 26, the thickness of the body 24 may increase to a thickness, illustrated at 78, of, for example, about 0.18 inch.

In order to provide some decoupling of forces of the mask to the nose region of the user's face for increased comfort, the body 24 is preferably provided with a convoluted and reduced thickness portion 74 across the nose portion 34 and running generally parallel to the edge 38. Thus, the convoluted portion 74 is provided to allow some controlled collapsing of the body material in the convoluted portion to reduce the pressure on the user's nose of the effects of tightening the mask on the face. For example, the thickness, illustrated at 76, of the body 24 at the convoluted portion 74 may be reduced to about 0.03 inch.

Referring to FIG. 8, the exhalation valve structure 44 is formed to have a raised body portion 79 having a circular opening, illustrated at 80, through which expired breath is released. A centrally disposed hub portion 82 is supported in the opening 80 by a plurality, such as four narrow spokes 84 (shown in FIG. 5) extending from the periphery of the opening 80 and spaced generally equally circumferentially thereabout. A button 86 is formed on the outer surface of the hub portion 82. The button 86 is shown to have a raised portion 88 and a central shaft 90 which connects the raised portion 88 to the hub 82. The raised portion 88 is shown to have three circumferentially spaced projections 92 separated by cut-outs, illustrated at 94. The hub portion 82 is shown to have cut-outs, illustrated at 96, which underlie the projections 92, respectively, entirely. The use of cut-outs 94 and 96 allows the molding process to be simplified. Thus, instead of using mold inserts to provide during molding the space between the hub 82 and the button 86, some of the material (cut-outs 94) of the button and some of the material (cut-outs 96) of the hub is "sacrificed" so that mold portions can reach into this otherwise inaccessible "overhung" area, without sacrificing the integrity of the hub or the button.

In order to prevent contaminated air from the environment from entering the breathing space 40 during inhalation, a flapper valve in the form of a thin circular disc 98 of rubber or other suitable material having a central aperture 100 is received to cover the opening 80 to act as a check valve. The valve 98 is "buttoned" to the hub 82 by stretching it at the aperture 100 over the button 86 so that the shaft 90 is received in the aperture 100 and the valve securely lies between the hub 82 and the button 86. The exhalation valve body 79 is molded to provide a circular raised ridge 102 on its outer surface and spaced radially outwardly of the opening 80 to be engaged by the valve disc 98 so as to provide a secure seal against the entrance of contaminated air from the environment during inhalation. However, the valve disc is unrestrained for movement outwardly so that exhaled air may freely pass outwardly through the opening 80 during exhalation. As seen in FIG. 1, the exhalation valve structure 44 may be suitably fitted with a protective cover 103 which is suitably formed with passages, illustrated at 105, for passage of exhalation gas. However, as stated above, a separate exhalation valve is not required for all masks and inserts.

Referring to FIGS. 10 to 13, the inhalation cartridge attachment structures each includes a body 104 having a circular opening, illustrated at 106, for receiving into the cavity 40 breathing air from the respective cartridge 22. A centrally disposed button 108, for receiving a flapper valve disc 110, which may be similar to valve disc 98, is supported by a narrow member 112 which extends across the opening 106. The button 108 is raised inwardly (toward the cavity 40) from the member 112 and connected thereto by a

centrally disposed shaft 114. The valve disc 110 has a centrally disposed aperture, illustrated at 116, wherein the disc 110 is stretched over the button 108 so that the shaft 114 is received in the aperture 116 to securely hold the valve disc. Cut-outs 118 are provided in the valve body 104 for ease of molding similarly as previously described relative to cut-outs 94 and 96 for the exhalation valve structure. The valve disc 110 acts as a check valve to allow breathing air from the respective cartridge 22 into the breathing cavity 40 during inhalation, but is desirably restrained by the valve body 104 from allowing exhaled air from passing outwardly and into the respective cartridge 22 and thus preventing moisture from the user's breath from getting into the cartridge materials. A pair of narrow members 200 extend from the valve body 104 into the opening 106 and are oriented generally at right angles to member 112 to support the valve disc 110 against its movement outwardly during exhalation and thus afford a better seal with the valve body 104 during exhalation. It should, however, be understood that a mask in accordance with the present invention need not contain an inhalation valve.

Each of the cartridges 22 is circular (but may be otherwise suitably shaped) and has in its engaging wall 128 an opening, illustrated at 120, which communicates with inhalation opening 106 for the delivery of breathing gas to breathing cavity 40. In order to maximize cartridge volume and maximize the user's view, the cartridges 22 are provided with off-center positions for the openings 120, and the means of attachment are formed so that the cartridges 22 are positioned toward the rear of the mask 20 (swept back) when attached, as seen in FIG. 1.

The adapter 104 for receiving a cartridge 22 comprises a lower floor 121 and a raised lip 122, which is vertically spaced from the floor 121 and connected thereto by a cylindrical portion 123 which defines the opening 106. The adapter 104 is a quarter-turn bayonet-mount necessitating only 90 degrees rotation for the respective cartridge to lock into place, as hereinafter discussed. The lip 122 is truncated on one pair of opposite sides, as illustrated at 124, leaving a pair, at 90 degrees thereto, of opposite circular portions 125 which extend radially (from the center of opening 106) farther than the distance radially which the truncated portions 124 extend. One of the truncations 124 is further formed to have a notch or keyway 126 at one end thereof. The respective cartridge opening 120 has the same shape as that of the lip 122, including a pair of truncated sides 132 and a similarly shaped notch or keyway 134 formed in one of the truncations 132 at one end thereof. When the keyways 126 and 134 are aligned, the lip 122 can be received within the opening 120, and the cartridge 22 can accordingly be received under the lip 122. By turning the cartridge 90 degrees, the portions 130 of the cartridge wall alongside the cartridge opening truncations 132 are received under the circular portions 125 of the lip 122 to attach the cartridge to the mask. The adapter 104 is formed to have a "stop" portion, illustrated at 141 in FIG. 1, diametrically opposite the keyway 126 for preventing turning of the cartridge in the wrong direction and for preventing further turning of the cartridge 22 beyond this desired point of attachment (beyond 90 degrees). Underneath each of the circular portions 125, the floor 121 is shaped to have a portion or ramp 136 which slopes toward the lip 122 from a circular portion end in the direction of rotation of the respective cartridge 22 for connecting it to the mask. The ramp 136 is thus provided to pinch the cartridge wall 128 as the cartridge is rotated into position and tighten it between the floor 121 and the lip 122 to tighten the cartridge onto the mask. A circular bead or

raised ridge **138**, which surrounds each inhalation valve adapter **104**, is molded into the mask body **24** to sealingly engage a bead (not shown) on the respective cartridge wall **128** to seal the adapter opening to prevent entrance of noxious gases in the environment. The cartridge wall **128** may have two such circular beads, the bead **138** being just outside of the outermost cartridge bead but close enough to sealingly engage therewith. The portion of the mask containing bead **138** is molded flat (so that the outer surface of the body **24** does not slope in the area thereof containing the bead **138**) so as to insure a good seal. It should be understood that the bead **138** is not required, and a suitable seal may be obtainable without the bead **138**. Raised nubs, illustrated at **140**, are provided on each cartridge wall portion **130** (disposed centrally along the length thereof and extending radially from the truncated edges **132**, respectively) to mate with corresponding grooves, illustrated at **131** (FIG. **11**), on the circular portions **125** to positively "click" the respective cartridge into position for use and to let the user know that it is in such position.

As shown in FIG. **2**, the keyways **126** are on the outer (toward the user's ears) truncations, and each inhalation structure **42** will accept the same cartridge with the result that it is desirably unnecessary to have different cartridges for the two structures **42**. Thus, for the structure **42** on the viewer's right, in FIG. **2**, the cartridge **22** is mounted with the cartridge opening **120** initially at the bottom of the cartridge, and the cartridge is rotated clockwise 90 degrees until the nubs **140** click into position with the cartridge swept back toward the rear to increase the user's vision. For the structure **42** on the viewer's left, the cartridge **22** is mounted with the cartridge opening **120** initially at the top of the cartridge, and the cartridge is rotated clockwise 90 degrees until the nubs **140** click into position with the cartridge swept back toward the rear to increase the user's vision. The cartridges may also be round and may be threaded to engage with a threaded port.

The harness **48** is of a two-point type having a single strap **150** connected at its end portions **152** to harness adjusters **46** for going around the back of the user's head and a second strap **154** sewed to strap **150**. Each harness adjuster **46** is a single piece integrally molded to an integral increased thickness portion **158** of the insert **26**. For example, portion **158** may have a thickness, of about 0.14 inch. The harness adjuster **46** has a planar portion **162**, the thickness, illustrated at **164**, of which may be equal to thickness **160**, of about 0.07 inch. Portion **162** has a straight slot, illustrated at **166**, entirely therethrough which is adjacent and parallel the terminal edge thereof and extends over most of the width thereof. A pair of straight slots, illustrated at **168**, extend entirely through portion **162** from the ends of slot **166** along the sides respectively of portion **162** to ends **170** and are of substantially the same length. An imaginary line, illustrated at **174**, between ends **170** defines a hinge about which a portion **172** within the boundary between slots **166** and **168** and imaginary line **174** flexes with respect to the rest, illustrated at **176**, of portion **162**. Flexure of portion **172** in the direction illustrated at **178** is limited by stop member **180** which is integral with portion **172** and extends across portion **172** adjacent to slot **166** and beyond slots **168**. The surface **182** from which the stop member **180** extends will be defined herein as the "touter" surface. The end portion **152** of the strap **150** passes outwardly through the slot **166** and out at the outer surface **182**. By pulling on strap end portions **152**, the buckle portions **172** flex outwardly and the strap **150** can as a result be adjustably tightened onto the user's head. As seen in FIG. **9**, the slot **166** is formed so that

it is narrower at the outer surface **182** than at the inner surface. When force is applied to pull the strap **150** in the other direction to loosen it, the stop member **180** substantially prevents flexure of the buckle portion **172** inwardly, and the strap **150** is punched between the buckle portions **172** and **176**. The harness straps are composed of a suitable resilient material so that they will give when the user's face moves.

In order to adjust the mask to various users' heads, in accordance with the present invention, the harness adjusters **46** are shaped to flex upwardly and downwardly, as illustrated by arrow **184**. In order to provide such flexion, a flexible hinge is provided in the form of a member **186** integral with and connecting portion **158** and the planar portion **162**. Member **186** is relatively thick in a direction normal to planar portion **162** to provide a suitable beam strength and is relatively thin in a direction parallel to a plane in which planar portion **162** lies to allow the desired flexion in the directions **184**. For example, the thickness, illustrated at **188** (FIG. **7**), of hinge member **186** in a direction parallel to a plane in which planar portion **162** lies may be about 0.10 inch to allow flexion of buckle in the direction **184**. Member **186** is shown to be generally half-moon shaped, and its greatest thickness, illustrated at **190** (FIG. **9**), over its length may, for example, be about 0.25 inch to provide the desired beam strength.

Turning to FIG. **14**, an alternate embodiment of the present invention provides a source of breathable gas that attaches to the mask **20** of the present invention as a substitution for the air purifying cartridges **22**. As will be evident to those of ordinary skill in the art, the mask **20** is easily adaptable for use with a reservoir bag **191** and a coupling member **192** as described and shown in U.S. Pat. No. 5,408,995 which is hereby incorporated by reference.

Thus, there is provided in accordance with the present invention a mask wherein a one-piece insert can be economically molded flat then bent to the desired shape and a body of pliable material molded thereto. The reduction in the number of pieces which would have to be molded separately offers an economic advantage. The mask with the living hinges and the pliable body has the flexibility to fit different faces yet has the rigidity to prevent collapse. The flexible hinges on the buckles allow the harness to adjust to different face sizes. Thus, the mask may be produced inexpensively to be versatile as well as reliable.

It should be understood that, while the invention has been described in detail herein, the invention can be embodied otherwise without departing from the principles thereof, and such other embodiments are meant to come within the scope of the present invention as defined by the following claims.

We claim:

1. A facepiece insert, comprising:

a central portion;

a pair of cheek portions disposed on opposite sides of the central portion and connected to the central portion by living hinges; and

a chin portion connected to the central portion by a living hinge.

2. The facepiece insert of claim 1, wherein the insert has at least one intake opening surrounded by an adapter and has at least one exhaust opening.

3. The facepiece insert of claim 2, wherein the adapter is capable of mating with at least one air purifying cartridge.

4. The facepiece insert of claim 2, wherein the adapter is capable of mating with a source of breathable gas.

5. The facepiece insert of claim 2, wherein the adapter is capable of mating with a reservoir bag.

9

6. The facepiece insert of claim 1, wherein the insert has an aperture with a valve adapted for the egress of exhaust gases.

7. The facepiece insert of claim 1, wherein the central portion, cheek portions, and chin portion are substantially rigid.

8. The facepiece insert of claim 1, further comprising:
at least one harness adjuster attached to each of the cheek portions of the insert.

9. The facepiece insert of claim 8, wherein the harness adjuster further comprises a connecting portion attached to the insert, a planar portion disposed in spaced apart relation to the connecting portion and capable of receiving a strap, and a flexible member extending between the connecting portion and the planar portion, the flexible member having a thickness in a direction normal to the planar portion that is greater than its thickness in a plane parallel to the planar portion.

10. The facepiece insert of claim 9, wherein the flexible member is substantially arcuate along its edge.

11. The facepiece insert of claim 1, wherein the insert is substantially flat.

12. The facepiece insert of claim 1, wherein the insert is formed out of a plastic mixture.

13. The facepiece insert of claim 12, wherein the plastic mixture includes polypropylene.

14. The facepiece of claim 1, wherein the central portion has integrally formed advertising indicia.

15. A respiratory mask, comprising:

a facepiece insert comprising:

a central portion;

a pair of cheek portions disposed on opposite sides of the central portion and connected to the central portion by living hinges; and

a chin portion connected to the central portion by a living hinge, the insert having at least one opening surrounded by an adapter;

a facepiece that is formed out of a soft flexible material and that adheres to the facepiece insert.

10

16. The respiratory mask of claim 15, wherein the adapter is capable of mating with an air purifying cartridge.

17. The respiratory mask of claim 15, wherein the adapter is capable of mating with a source of breathable gas.

18. The respiratory mask of claim 15, wherein the adapter is capable of mating with a reservoir bag.

19. The respiratory mask of claim 15, further comprising:
at least one harness adjuster attached to each of the cheek portions of the insert.

20. The facepiece insert of claim 19, wherein the harness adjuster further comprises a connecting portion attached to the insert, a planar portion disposed in spaced apart relation to the connecting portion and capable of receiving a strap, and a flexible member extending between the connecting portion and the planar portion, the flexible member having a thickness in a direction normal to the planar portion that is greater than its thickness in a plane parallel to the planar portion.

21. The facepiece insert of claim 20, wherein the flexible member is substantially arcuate along its edge.

22. The respiratory mask of claim 15, wherein the insert is formed from a plastic material.

23. The respiratory mask of claim 15, wherein the facepiece material comprises an elastomer selected from the group consisting of Sanoprene and Kraton.

24. A method of forming a respiratory mask, comprising the steps of:

providing a facepiece insert comprising:

a central portion;

a pair of cheek portions disposed on opposite sides of the central portion and connected to the central portion by living hinges; and

a chin portion connected to the central portion by a living hinge, the insert having at least one opening surrounded by an adapter;

molding a facepiece material in sealing engagement around the insert.

* * * * *